

Fire/Smoke Damper

MS2

Class II • 1½ Hour • 250°F or 350°F • Galvanized Steel • Single Thickness Blade • UL Classified Damper

STANDARD CONSTRUCTION

FRAME:	5½" x ½" x 16-GA galvanized steel hat channel
BLADES:	16-GA galvanized steel single thickness; Parallel action
AXLES:	Plated solid steel stub
BEARINGS:	Oil impregnated bronze
LINKAGE:	Plated steel angle and crank plates with stainless steel pivots; in-jamb type or on-blade type
STOPS:	18-GA galvanized steel angles at head and sill
BLADE SEALS:	Silicone
JAMB SEALS:	Stainless steel
SLEEVE:	Minimum 20-GA galvanized steel by 18" long (sizes greater than 84" wide or 84" high require minimum 18-GA)
CAULKING:	Hardcast Irongrip 601 or UL-listed equivalent
ACTUATOR:	Electric with heat response device (EHRD) or pneumatic with heat response device (FHRD); Factory-installed for Power-Open/Spring-Close (fail close) operation; External left hand mounted as viewed from jackshaft side of damper
FINISH:	Mill

OPTIONS

Exact Size
Sleeve - Transition
Actuators - 120V, 24V, 230V or Pneumatic
Right Hand and/or Internal Actuator Mounting Locations (Restrictions Apply)
Integral Dual Position Indication (IDPI) Switches
Sensotherm Re-Openable Heat Response Device (ESOT) for Electric Actuator
Sensotherm Re-Openable Heat Response Device (EPOT) for Pneumatic Actuator
Model SM-501 Flow-Rated Smoke Detector (10" Minimum Damper Height)
Model 2151 No-Flow Smoke Detector (12" Minimum Damper Height)
Remote Test Box
Copper Tubing (For Pneumatic Actuators)
Transformers
Tab-Lock Retaining Angles - 1 or 2 Sets
Bearings - Stainless Steel
Axle - Stainless Steel
Security Bars
Short-Width (<8") and/or Short-Height (<8") Transitions


NOTES

- "A" width and "B" height are opening dimensions. Dampers are provided approximately ¾" undersize.
- Damper with smoke detector must have a minimum sleeve of 19" (10.5" on the actuator side and 3" on the non-actuator side).
- Dampers for horizontal installation can only be mounted in a fire barrier constructed of masonry/concrete materials.

DAMPER SIZE


		2000 fpm, 4 in. wg						3000 fpm, 4 in. wg		
Orientation	Hor & Vert	Horizontal		Vertical				Hor & Vert	Horizontal	Vertical
Panels	Minimum Panel	Max Panel 250"/350"	Max Assy 250"/350"	Max Panel 250"	Max Panel 350"	Max Assy 250"	Max Assy 350"	Max Panel 250"	Max Assy 250"	Max Assy 250"
Rectangular	4"W x 4"H (8"W x 8"H frame)	36"W x 48"H	72"W x 48"H	36"W x 48"H 48"W x 36"H	48"W x 24"H	144"W x 70"H	128"W x 62"H	36"W x 36"H	72"W x 36"H	108"W x 36"H
Round	4" dia. (8"W x 8"H frame)	34" dia.	46" dia.	34" dia.	22" dia.	68" dia.	60" dia.	34" dia.	34" dia.	34" dia.
Oval	4"W x 4"H (8"W x 8"H frame)	34"W x 46"H	70"W x 46"H	34"W x 46"H 46"W x 34"H	46"W x 22"H	45 sq.ft 106"W or 68"H	106"W x 60"H	34"W x 34"H	70"W x 34"H	106"W x 34"H

*Dampers smaller than minimum frame size require a transitions. Reference SD-TRFS.

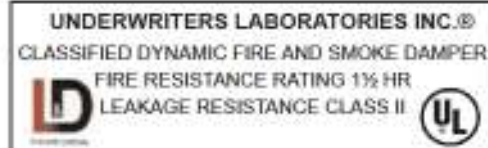

This combination fire/smoke damper meets the construction and performance requirements of:

- Underwriters Laboratories Inc. Standard 555S
- National Fire Protection Association Standards 80 and 90A
- ICC's International Building Code
- California State Fire Marshal Listing #3225-1328:119
- Underwriters Laboratories Inc. Approved for dual direction airflow and dynamic conditions.
- Underwriters Laboratories Inc. Classified for use in fire resistive ratings of less than 3 hours
- Underwriters Laboratories Inc. Classified for use in smoke control systems for Leakage Class II and 250°F or 350°F.
- Actuators must be arranged to operate automatically, must fail closed upon loss of power, and must be controlled by a smoke detection system.

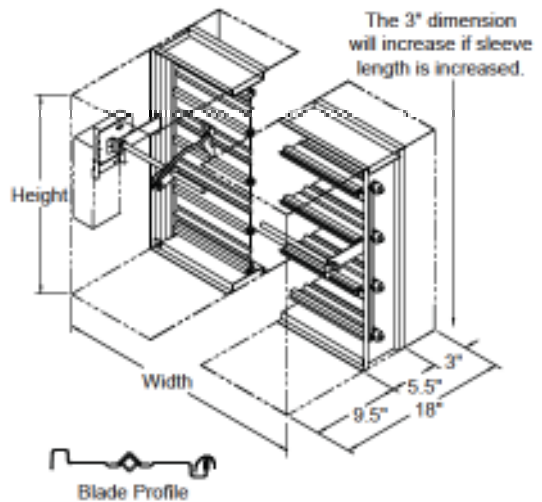

MS2**Fire/Smoke Damper**

Class II • 1½ Hour • 250°F or 350°F • Galvanized Steel • Single Thickness Blade • UL Classified Damper

Operations Rating:

Maximum Differential Pressure: 4 in.wg

Maximum Face Velocity: 2000 fpm (3000 fpm for selected size/actuator combinations)

Leakage Rating:

UL Class II

10 cfm per sq.ft. maximum @ 1 in.wg

20 cfm per sq.ft. maximum @ 4 in.wg


Sound Ratings:

The Noise Criterion data below was tested in accordance with ASTM E-477.99 in the center octave band.

Damper Size	Noise Criterion (NC)			
	Velocity (fpm)			
	1000	2000	3000	4000
12"W x 12"H	31	53	64	71
24"W x 24"H	33	54	65	n/a

Pressure Drop Ratings:

The pressure drop data shown below is based on laboratory conditions. The test setup does not take into account elbows or other duct fittings that are part of every actual duct system. The configuration of the actual duct system immediately upstream and downstream of the damper often contributes more pressure loss than the damper itself.

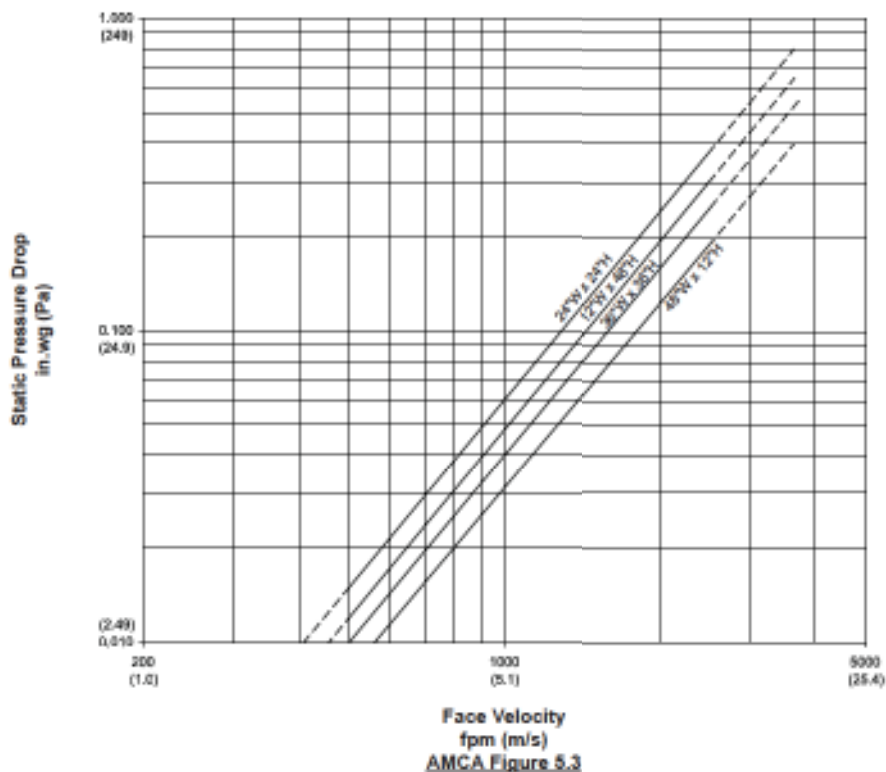

This product was tested
in accordance to AMCA
Standard 500D